


# ECLIPSE 270°


## AWNING WALLS INSTRUCTIONS



1

DETERMINE THE POSITION OF THE WALL USING THE DIAGRAM BELOW.

LOCATE THE LABEL ON THE WALL AND LINE THIS UP WITH THE LABEL ON THE AWNING. THIS WILL HELP IDENTIFY THE ZIP STARTING POSITION.




2

CONNECT ZIPS AND COMPLETELY ZIP THE WALL TO THE AWNING.


**NOTE:** ENSURE THE INSERT PIN ON THE AWNING'S ZIP IS SEATED FULLY INTO THE WALL'S RETAINING BOX BEFORE COMMENCING TO SLIDE THE ZIP.

WHILST ZIPPING, IT IS ESSENTIAL TO HOLD UP THE WALL WITH YOUR OPPOSITE HAND OR WITH THE AID OF A HELPER TO RELIEVE PRESSURE OFF THE ZIP. FAILURE TO DO THIS MAY DAMAGE THE ZIP TEETH WHICH WILL VOID ANY WARRANTY.



3

ANCHOR THE WALLS TO THE GROUND USING THE PEGS SUPPLIED.

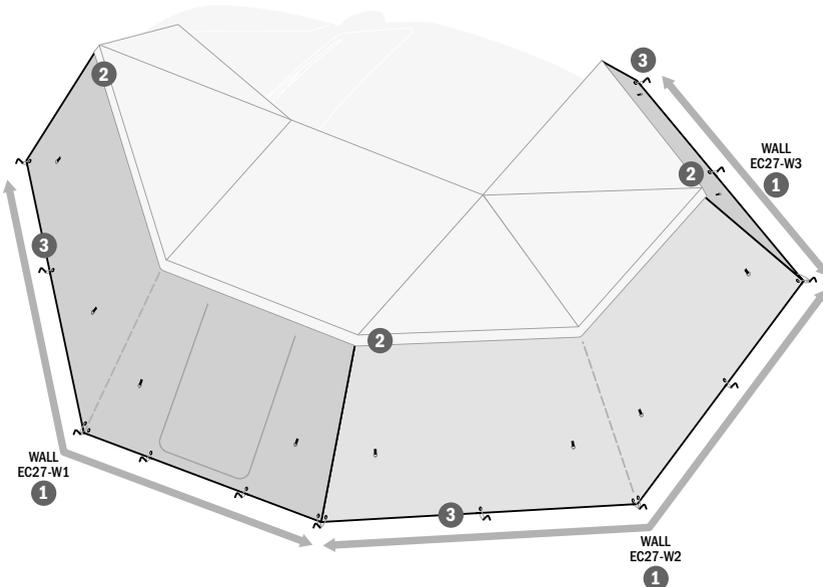

# ECLIPSE AWNING WALLS

## AWNING WALLS CARE INSTRUCTIONS

### CLEANING

Clean with cold water and a soft bristle brush. Do not use soaps and detergents. Do not expose to petrol, diesel, oils or chemicals of any nature.

### STORING

Correct storage is vital for the longevity of your Eclipse awning walls. If on occasion the awning and walls are required to be stowed wet, it is essential it is unpacked and dried as soon as possible. Rot, mildew damage and incorrect storage is not covered under warranty.

### STRUCTURAL INTEGRITY

The Darche Eclipse Awning has been designed for general camping use under normal conditions. Always ensure all guy ropes are anchored correctly. It may be necessary to re-adjust guy ropes and pegs at times to maintain the structural integrity of the awning.

**!** TO AVOID CHANCES OF PERSONAL INJURY AND OR PROPERTY DAMAGE, DARCHE HIGHLY RECOMMENDS THE ECLIPSE AWNING SHOULD NOT BE ERECTED DURING WINDY CONDITIONS. DAMAGED CAUSED BY WIND AND OR ADVERSE WEATHER WILL NOT BE COVERED UNDER WARRANTY.

### USING THE OPTIONAL WALLS

The zip on awning walls will provide a sheltered / protected area around the awning. When attached to the awning, they are designed to create a shaded area and help reduce dust.

**!** ENSURE THE WALLS ARE ANCHORED AT ALL TIMES WHILST ATTACHED TO THE AWNING. IN WINDY CONDITIONS IT IS HIGHLY RECOMMENDED NOT TO ERECT THE AWNING AND WALLS AS PERSONAL INJURY AND OR PROPERTY DAMAGE MAY OCCUR.

### WATERPROOFNESS

Darche has taken great care in its refined raw material selection, design and development of their tents and awnings in regards to waterproofness. With the use of water repellent coatings and High Frequency seam sealing, Darche have strived to eliminate water ingress as best as possible on its recreational tents, shelters and awnings.

Unfortunately with the addition of zips and multiple layer seams, wind driven rain may cause water to ingress at times. To minimise this, ensure all rain flaps are adequately covering the zips.

Seams connecting multiple layers of fabric could leak at times depending on weather conditions and location. A quick and easy solution is to rub a softened wax stick over the affected area.

## **!** SAFETY WARNINGS

KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THE FABRIC.

UNDER NO CIRCUMSTANCES SHOULD ANY NAKED FLAME SOURCES BE USED NEAR THE AWNING.

KEEP CAMP FIRES AWAY FROM THE AWNING.

KEEP A LOOK OUT FOR ANY AIRBORNE BURNING EMBERS THAT MAY COME INTO CONTACT WITH THE TENT.

KEEP A FIRE EXTINGUISHER OR WATER BUCKET NEARBY.

DO NOT OPERATE ANY DEVICE WHICH BURNS FUEL INSIDE THE AWNING WHILE WALLS ARE ATTACHED.

KEEP EXITS CLEAR.

DARCHE RECOMMENDS FIXING ALL GUY ROPES AT ALL TIMES WHEN AWNING IS IN USE.

REMAIN CAUTIOUS AROUND GUY ROPES TO PREVENT INJURY.

ENSURE CHILDREN ARE SUPERVISED AROUND THE AWNING AT ALL TIMES.