

3282 Floating Jib Lead Ring

USA – Tel: (+01) 262-691-3320 • Web: www.harken.com • Email: harken@harken.com
Italy – Tel: (+39) 031.3523511 • Web: www.harken.it • Email: techservice@harken.it



WARNING! Strictly follow all instructions to avoid an accident, damage to your vessel, personal injury or death. See www.harken.com/manuals for additional safety information.

Features

Weight saving alternative to blocks - simple, weight-saving used to route line for floating jib leads in-haulers, and twings



Machined 6061-T6 Aluminum - for durability and corrosion resistance

Hard-Lube anodized - provides slippery durable surface

Terms



Dimensions

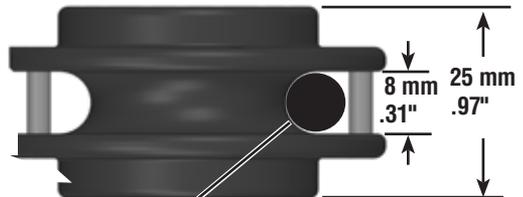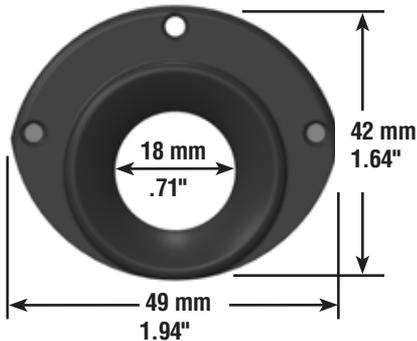

Maximum adjuster line diameter 7 mm
(9/32")

Application

Pass adjuster line through channel under dowel pins. Pass sheet through throat. McLube® Sailcoat™ may be used to make the surface more slippery.



WARNING! Do not spray ring while it is on boat. McLube Sailkote overspray will cause slippery decks which may result in loss of footing, falling overboard and personal injury or death.



Maintenance, Inspection, and Storage

Periodically inspect components for wear, corrosion, and loosening. Replace as necessary. Clean and inspect:

- Fairlead and dowel pins
- Adjuster line and splices

Frequently flush with fresh water. Periodically clean with mild detergent and water solution. Flush with fresh water. Avoid exposure to teak cleaner and other caustic solutions.



Clean fairleads as above before storage. Store in a dry location.

Warranty

For additional safety, maintenance, and warranty information see www.harken.com/manuals or the Harken catalog.

McLube is a registered trademark of McGee Industries, Inc.
Sailkote is a trademark of McLube®, a Division of McGee Industries.

M1024 08-18