



English



profurl.com



Roland Jourdain - We Explore - 2022 Route du Rhum

FURLING SYSTEMS





NEX
FLYING SAILS FURLER

NEX

Flying sail furlers

NEX, THE NEW GENERATION FURLER

The new version of the Nex furler is now available with many innovations and technological improvements. These innovations, resulting from our expertise gained since the launch of the first version of the NEX in 2010 will bring you even more performance, safety and comfort when sailing. Its range of 7 models covers all sizes of sails (up to 350m²) and enables it to equip boats of more than 80'.

Why choose a NEX furler?

- **Performance:** Speed of furling, weight and optimized footprint
- **Comfort and safety** during furling/unfurling operations FurlAssist (pawl function), ease of furling
- **Ease of use:** easy installation, fast and intuitive sail trimming
- **Reliable**, proven and maintenance-free technology
- **Wide range of end fittings** for better adaptation to your deck layout
- **Product with modern design**
- **3-year international warranty**





What types of sails?

NEX furlers are intended for flying light wind or heavy sails. Developed in partnership with the largest sailmakers, the NEX furlers allow you to get the best out of your sails while handling them easily and safely

↙ **Light sails:**
Gennaker, Code 0, Screacher, light genoa

↙ **Heavy sails:**
• Solent, stay sail

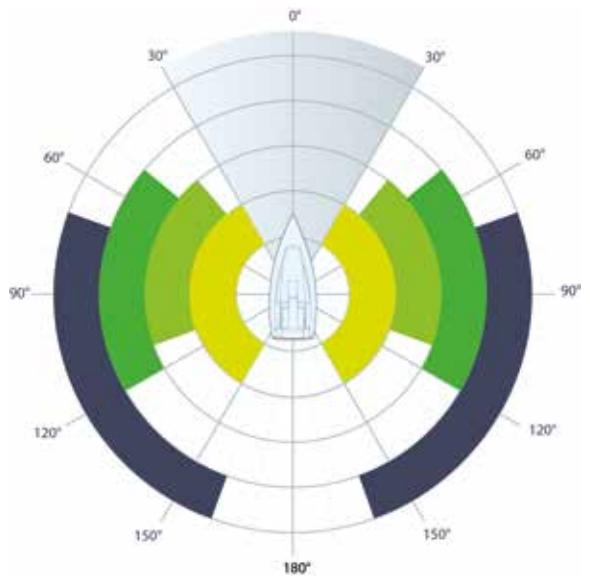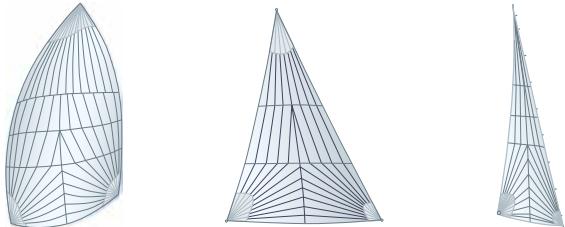

NEX furlers: the reference in the racing world:

Since their launch in 2010, NEX furlers have often been in the lead in offshore races and have been chosen to equip the most efficient yachts:

- IMOCA,
- Class 40,
- Ultim,
- Multi 50,
- M32,
- Mini 6.50
- Etc...

Classe 40 - Inter Invest - Matthieu Perraut



NEX

Flying sail furlers

SAFETY

SAFE SYSTEM : Removable line

Already present on the 1st generation of NEX, the SAFE SYSTEM enables you to stop the furling line running during sail deployment and therefore helps:

- prevent accidents or damage caused by a free running line.
- manoeuvre more quickly and easily
- prevent excessive wear of the line



NEW TERMINALS:

- Swivel eye
 - Compact halyard block
 - Solid sheave
- See pages 30 and 31

PERFORMANCE

OPTIMUM FURLING : Furl quickly and without effort

A real technological improvement, Nex drums are the widest on the market and provide:

- Fast furling speed
- Comfortable furling needing less effort during manoeuvres. A real advantage with small crews



XTRA-LITE SYSTEMS : Continuously striving for lightness

The general design and the choice of materials enable us to offer systems that are ever lighter for:

- Improved performance of the boat
- Ease of use of the systems during manoeuvres



S-GRIP : Better line grip

The specific design of the drum groove provides:

- Better rope grip
- Easier sail furling without skidding
- Limited rope wear



NEW :
**Anti-shock housing for
better protection and longer life**



EASY TO USE



I-CONNECT: Quick fit sailing system

Available on swivel shackle and drum mechanisms, I-Connect offers:

- Quick opening and closing of the pin by pulling on the ball (regardless of the direction of the force)
- Excellent grip (even with gloves)
- A simple new mechanism without jamming - easy to dismantle



QUICK FIT: Line Fitting

Already present on the 1st NEX, Quick Fit makes fitting and removing a spliced line quick and easy:

- Quick Installation
- Possibility of splicing to length
- Possibility of leaving the line in position
- Possibility of using the same line for several systems



TUNE & LOCK: Easy fitting and adjustment

Installation and adjustment of the housing is made simple with a single screw:

- Precise adjustment of the housing according to the orientation of the line
- Decreases the friction of the line on the housing
- Automatic height adjustment of the housing

INNOVATION!

FURLASSIST: INTUITIVE AND SAFE ASSISTANCE FOR FURLING



A MAJOR INNOVATION of this new Nex range, the FURLASSIST ratchet function is a real plus for your manoeuvres allowing::

- Better control of furling avoiding accidental unfurling of the sail
- Reliable furling due to the permanent engagement of the pawl
- Safety: it only unlocks when hauling in the line fast
- Simplicity: operates in both directions and without additional line
- Easy installation and removal (2 screws)


NEX

Flying sail furlers

SELECTION TABLE

	NEX 0.9	NEX 1.5	NEX 2.5	NEX 4.0	NEX 6.5	NEX 8.0	NEX 12.0
Light sail area (i.e gennaker)*	35m ²	60 m ²	80 m ²	140 m ²	240 m ²	300 m ²	450 m ²
Stormsail area*		20 m ²	30 m ²	45 m ²	65 m ²		
Option : Ratchet feature FurlAssist	✓	✓	✓	✓	✓	✓	✓
Working Load**	900 Kg	1500 Kg	2500 Kg	4000 Kg	6500 Kg	8000 Kg	12.000 Kg
Spool diameter	120 mm	150 mm	180 mm	220 mm	220 mm	250 mm	250 mm
Standard lower terminal	Clevis pin snap shackle	Clevis pin snap shackle	Clevis pin snap shackle	Clevis pin snap shackle	Trigger snap shackle	-	-
Standard upper terminal	Swivel eye	D shackle	D shackle	D shackle	D shackle	-	-
Examples for a monohull	Mini 6.50 - Cruising boat 27'	Cruising boat 32'	Cruising boat 42'	Cruising boat 50'	Cruising boat 55'	Cruising boat 60'	Cruising boat +65'

List of terminals and options available

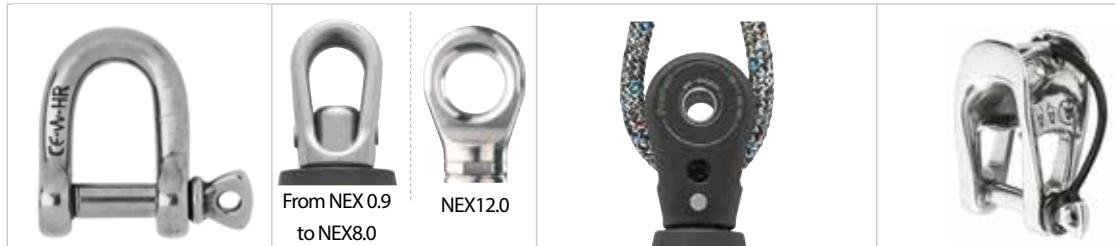

Description	D shackle	Eye	Halyard block	MXEvo: halyard shackle
Benefits	• Wichard forged shackle in High resistance stainless steel	• Compact • Prevents the rope wear • Perfect for lashings	• 2/1 halyard • No loop - no twist • Compact • Dismantable • With balls + bearing	• 2/1 halyard • Becket for 3/1 purchase • Heavy load • Compact • Stainless steel • Rope dia: 8 to 14 mm
Upper terminals	As standard on all models but NEX 0.9 - NEX 8.0 - NEX 12.0	• As standard: NEX0.9, • Option: all models	• Option for all models (not available for NEX 0.9 & NEX1.5)	• Option for all models (not available for NEX 6.5 - NEX 8.0 - NEX 12.0)
Lower terminals	X	Option: for models up to NEX4.0	• Option for all models (not available for NEX 0.9 & NEX1.5)	• Option for all models (not available for NEX 6.5 - NEX 8.0 - NEX 12.0)

*: The values shown in the table are for information only and should be verified by a professional taking into account the characteristics of the boat.

** The working loads shown are the maximum working loads of the mechanisms only and are not the loads of the complete system when terminals are included. The product should not be used above these working loads in any circumstances.

Profurl + points: Proven and unique technology

- Performance even under high loads
- Reliability and longevity of the mechanisms



NEX furlers and manual furlers share the Profurl technology that has created the reputation of the brand: Profurl mechanisms are the only ones to use bearings made from very hard **100C6 carbon steel** which allow furling even under high loads (no crushing of the balls). The mechanism is mounted in a waterproof grease bath and is protected from external aggressions (salt, sand, etc.) and does not require any maintenance.

Standard version	Fairlead version	For NEX 6.5	For NEX 8.0	
Clevis pin snap shackle	Trigger snap shackle	Solid sheave		Swivel hook
<ul style="list-style-type: none"> • Wichard forged snap shackle • Ergonomic ball for quick opening • Fairlead feature (part # 54106) 	<ul style="list-style-type: none"> • Wichard snap shackle • Quick opening • Compact 	<ul style="list-style-type: none"> • With becket • Quick opening • 3/1 purchase • Stainless steel 		<ul style="list-style-type: none"> • Weight savings • Compact • Ease of installation (no drilling) • Reduce mast compression <p>• Option: NEX 2.5, NEX 4.0, NEX 6.5, NEX 8.0 and NEX 12.0</p>
X	X	X		X
<ul style="list-style-type: none"> • Standard versions: from NEX 0.9 to NEX4.0 • Fairlead version: NEX 0.9 & NEX1.5 	<ul style="list-style-type: none"> • As standard: NEX 6.5 • Option: NEX 8.0 	Option: from NEX1.5 to NEX12.0		

ACCESSORIES**SOFT SNATCH BLOCKS - FOR 2/1 HALYARD**

5 models available - Rope size: 10 to 24 mm.
Sheave and cheeks in anodised aluminium

**STAINLESS STEEL AND ALUMINIUM THIMBLES**

Available in stainless steel or aluminium, their form facilitates the positioning of the sail in the mechanism forks. Their cut-outs allow good positioning of the lashings avoiding excessive wear. Stainless steel thimbles are an economical solution. Aluminium thimbles provide performance and lightness; they are used for racing programmes.

**CABLE-FREE THIMBLES**

The cable-free thimbles aim at being installed on sails without furling cable. Their specific design enables the optimized furling and easy fitting of the webbings. Available in 3 sizes for NEX2.5, 4.0, 6.5 and 8.0

**ANTI -TORSION CABLE CLAMPS**

For anti-torque cables (dia 9, 11, 13 and 15 mm)

- Can be used for gennaker with Marlow ProDrive +
- Can be used for asymmetric spinnakers with most of the anti-torque cables available on the market
- Material : Duplex grade stainless steel

**ANTI-TORQUE CABLES :**

Profurl offer anti-torque cables cut at length in various diameter

- Dynex Hampidjan cable - available in 9, 11, 13 and 15 diameter
- Cable Marlow ProDrive2 - available in 9, 11, 13 and 15 diameter

**SPLICED FURLING LINES**

Available in 8 and 10 mm diameter - From 12 to 26 m. High quality spliced furling line offering higher product lifetime. Prevents the risk to be locked into the spool. More information on page 42

**PROTECTION COVER**

Our protection covers are available for the NEX spools and swivels as well as for the swivel locks. They will help increase the product lifespan and protect your boat against accidental shocks. Highly resistant, they also have a reflective strip for nighttime.

**FLYING SAIL FURLER WITH DRUM**

- > With a drum and a single furling line similar to manual headsail furler.
- > Economical system.
- > Easy to install on board



Contact us for more information

FLYING SAILS FURLER NEX SPEED

The NEX SPEED is the Racing version of the NEX. Available in NEX2.5 and NEX4.0 versions, they feature the same mechanisms but with more compact spools. It is the perfect unit for regatta and offshore racers looking for enhanced manoeuvrability, performance and weight..

Why choose the NEX SPEED?

- > Quick furling
- > Light and compact
- > Strength (working load: 2.5T & 4T)

User programme for the NEX SPEED

- > Sport boats
- > Single-hulled, type Figaro 3, L30, etc.
- > Foil catamarans type TF35, multi-hulled type GC32
- > Class 40

	NEX 2.5 SPEED	NEX 4.0 SPEED
Light sail area (i.e gennaker)*	80 m ²	140 m ²
Ratchet feature FurlAssist	✓	✓
Working load **	2500 Kg	4000 Kg
Spool diameter	150 mm	180 mm
Standard lower terminal	Clevis pin snap shackle	
Standard upper terminal	D shackle	
Examples for a monohull	Sailing boat 30' 35'	Sailing boat 40'

*: The values shown in the table are for information only and should be verified by a professional taking into account the characteristics of the boat.

**: The working loads shown are the maximum working loads of the mechanisms only and are not the loads of the complete system when terminals are included. The product should not be used above these working loads in any circumstances.



© Breschi



CYCLOPS MARINE

SMART TOGGLE® - 4T: wireless load sensor



Improve the boat performance by measuring in real time luff tension!

- For NEX 4.0 flying sail furler (other sizes on demand)
- Easy to install, light & compact
- Waterproof and durable
- Bluetooth connectivity (mobile app or boat's display)

TECHNICAL DATA

- Working load 4T - Pin to pin: 90 mm - Pin dia: 12 mm - Battery Life 2000 hours @ 1Hz


NEX

Flying sail furlers

TECHNICAL DATA


Technical data: spool	NEX 0.9	NEX 1.5	NEX 2.5	NEX 2.5 SPEED	NEX 4.0	NEX 4.0 SPEED	NEX 6.5	NEX 8.0	NEX 12.0
Height pin to pin: A mm	74,1	81,1	100,2	97	115	118	126	137	166,5
Width drum mechanism: B mm	128	160	192	160	234	192	232	263	263
Width fork: C mm	12	15	18	18	19	19	25,1	25,1	25,1
Depth under pin: F mm	18	22	26	26	33	33	39	39	43
Ø pin G mm	8	8	10	10	12	12	14	14	18
Ø spool: mm	119	149	179	149	219	179	219	249	249
Ø continuous line mm	Ø8	Ø8	Ø10	Ø8	Ø10	Ø10	Ø10	Ø10	Ø10
Weight: spool (only) Kg	0,380	0,540	0,995	0,720	1,490	1,160	1,730	2,440	3,198

Technical data : Mount end piece	NEX 0.9	NEX 1.5	NEX 2.5 & NEX 2.5 SPEED	NEX 4.0 & NEX 4.0 SPEED	NEX 6.5	NEX 8.0	NEX 12.0
Snap shackle - part# fig 1, 4 & 5	54100	54100	54101	54102	59206	2957	-
A : Height Axle-arm : (mm)	39,6	39,6	54	65	99,4	94	-
D : Max inner ø (mm)	16	16	21	26	25	17	-
Weight (kg)	0,054	0,054	0,130	0,257	0,27	0,810	-
MxEvo : halyard shackle FIG 2	MxEvo 6 - 11603		MxEvo 8 - 11604	MxEvo 10 - 11605	-	-	-
A (mm)	32		35	43,5	-	-	-
D: Max inner ø (mm)	9		11	15	-	-	-
Weight (Kg)	0,053		0,109	0,022	-	-	-
Solidsheave 3:1: FIG 3		55018	54555	54105	54554	P598050	P591250
A (mm)	-	26,8	29	31	30,5	45,85	56,2
D: Max inner ø (mm)	-	10	12	16	15	23	25
Weight Kg	-	0,113	0,200	0,280	0,350	0,750	1,238

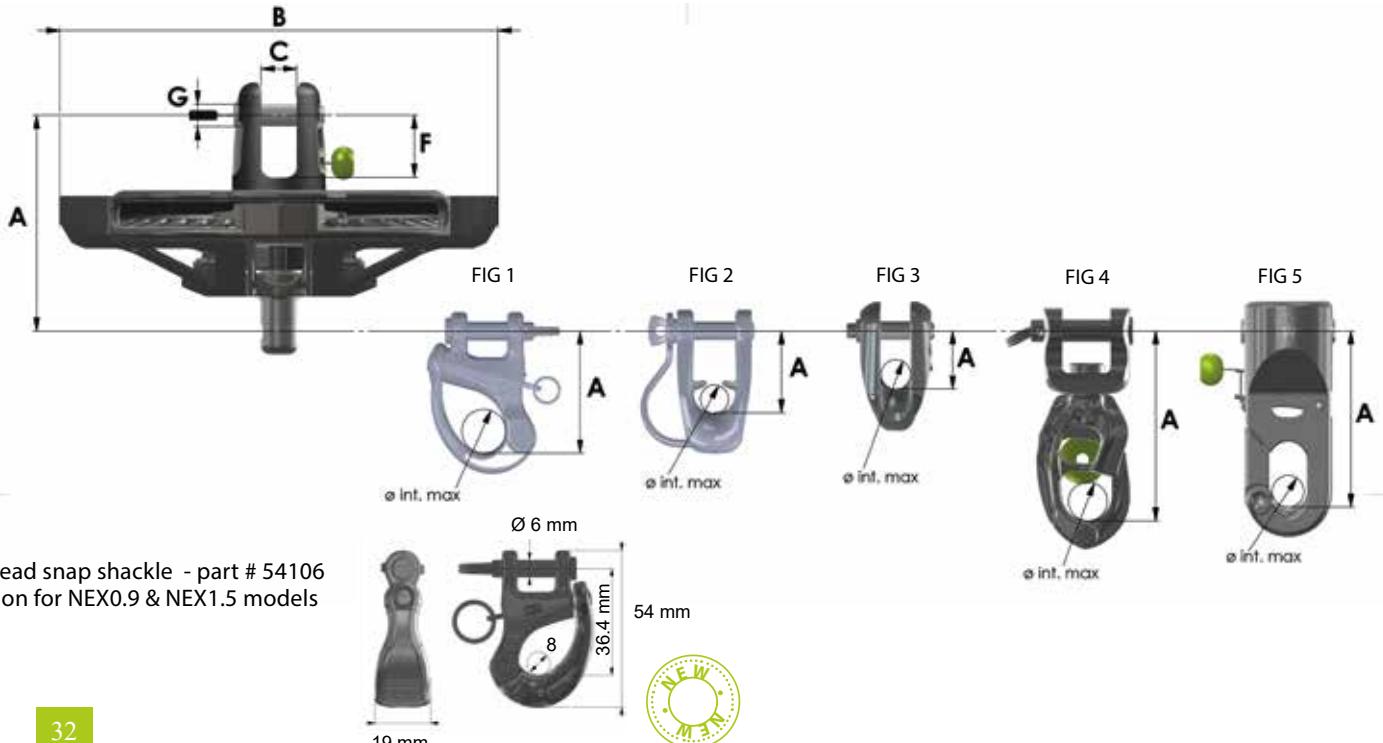

Technical data: swivel	NEX 0.9	NEX 1.5	NEX 2.5 & NEX 2.5 SPEED	NEX 4.0 & NEX4.0 SPEED	NEX 6.5	NEX 8.0	NEX 12.0
Height pin to pin: D mm	63,3	56,2	68,3	82,7	97,7	104,5	128
Width swivel: E mm	31	34	42	50	60	65	72
Width fork: C mm	12	15	18	19	25,1	25,1	25,1
Depth under pin: F mm	18	22	26	33	39	39	43
Ø pin G mm	8	8	10	12	14	14	18
Weight: swivel (only) Kg	0,110*	0,140	0,260	0,470	0,730	0,970	1,638
Max ø luff line mm	9	11	13	15	17	19	21
Technical data : swivel terminals	NEX 0.9	NEX 1.5	NEX 2.5 & NEX 2.5 SPEED	NEX 4.0 & NEX4.0 SPEED	NEX 6.5	NEX 8.0	NEX 12.0
Wichard HR shackle: Fig 1		Part # 11203	Part # 11204	Part # 11205	Part # 11206	Part # 11207	Part # 11208
ø pin (mm)	-	6	8	10	12	14	16
A / B (mm)	-	24/12	32/16	40 / 20	48/24	56/28	64/32
Weight Kg	-	0,024	0,052	0,102	0,192	0,304	0,464
Eye: Fig 2	Standard	part #p591545	part #p592545	part #594045	part #p596545	part #p598045	part #59248
A (mm)	13,5	20	27,5	35,5	45,8	51,7	NC
D Inner ø. max (mm)	11	13	17	22	28	32	28
Weight (Kg)	0,018	0,034	0,078	0,142	0,287	0,429	1,675
MXEvo : halyard shackle Fig 3		MXEvo 6 part #11603	MXEvo 8 part #11604	MXEvo 10 part#11605	-	-	-
A (mm)	-	32	35	43,5	-	-	-
D:ø int. max (mm)	-	9	11	15	-	-	-
Poids (kg)	-	0,053	0,109	0,222	-	-	-
Halyard block: Fig 4			part #P592530	part #P594030	part #P596530	part #P598030	part #P591230
A (mm)	-	-	24,5	32	38	48	52,5
Sheave ø : B (mm)	-	-	46,4	58	64	80	100
Height : C (mm)			66	84	96	120	142,5
D: Max Inner ø (mm)	-	-	10	14	16	18	22
Weight Kg	-	-	0,178	0,310	0,505	0,985	1,595


* : incl swivel eye

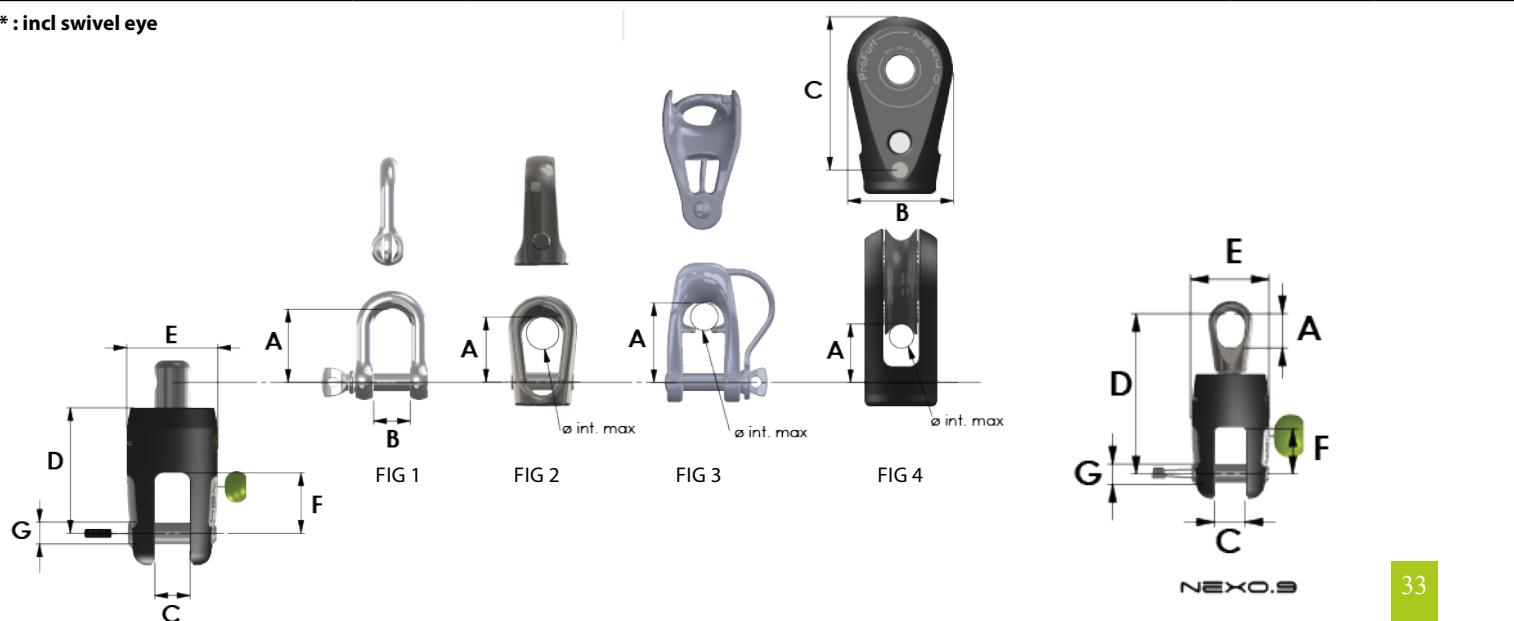

TECHNICAL DATA


Stainless steel thimbles: Fig 1

	NEX 0.9	NEX 1.5	NEX 2.5 & NEX 2.5 SPEED	NEX 4.0	NEX 6.5	NEX 8.0	NEX 12.0
Part #	59164	59025	59026	59027	59028	-	
A (mm)	40	57	67,5	78	105	-	
B (mm)	11,5	14,5	17,5	18,5	24,8	-	
C (mm)	30	38	45	52	70	-	
ø d (mm)	8,3	8,3	10,3	12,3	14,3	-	
E (mm)	12	16	18,5	21,5	30	-	
ø F (mm)	9	11	13	15	20	-	
Weight Kg	0,030	0,073	0,126	0,190	0,382	-	

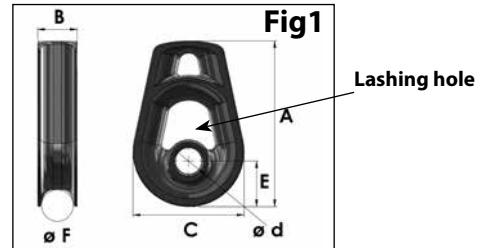


Aluminium thimbles: Fig 2

	NEX0.9	NEX 1.5	NEX 2.5 & NEX 2.5 SPEED	NEX4.0	NEX 6.5	NEX 8.0	NEX12.0
Part #		59165	59166	59167	59168	59279	
A (mm)	-	56	66,5	79	108	119	
B (mm)	-	14,5	17,5	18,5	24,8	24,8	
C (mm)	-	38	45	54	70	78	
ø d (mm)	-	8,3	10,3	12,3	14,3	18,3	
E (mm)	-	15	17,5	21	31,5	34,8	
ø F (mm)	-	11	13	15	19	21	
Weight Kg	-	0,032	0,054	0,074	0,190	0,230	

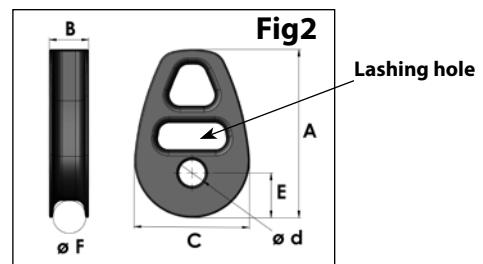


Cableless thimbles: Fig 3

		NEX 2.5 & NEX 2.5 SPEED	NEX 4.0	NEX 6.5	NEX 8.0
Top thimble	Part #	59210	59212	59214	
	A mm	45,50	63,50	81	
	B mm	22*7	27*7	47*12	
	C mm	10	12	14	
	Weight Kg	0,100	0,163	0,349	
Bottom thimble	Part #	59211	59213	59215	
	A mm	50,3	68,25	89,70	
	B mm	22*7	27*7	47*12	
	C mm	10	12	14	
	Weight Kg	0,107	0,177	0,484	

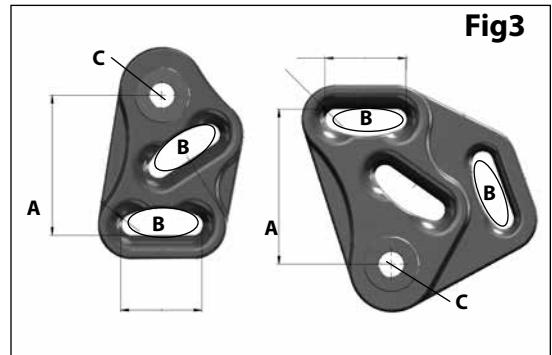

Cable clamps : Fig 4

	NEX 0.9	NEX 1.5	NEX 2.5	NEX 4.0
Part #	7321	7322	7323	7324
Cable size max mm	9	11	13	15
A mm	8,5	10	12	15
B mm	29	31	35	40
L mm	56	60	62	100
Weight Kg	0,169	0,198	0,243	0,525

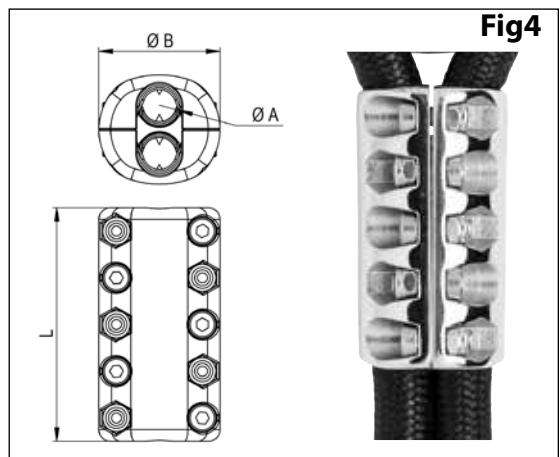

PROFURL DISTRIBUTORS PER COUNTRY

Country	Name	Zip code	Town	Area code	Phone	E-mail
Australia	Wichard Pacific Pty Ltd	NSW 2044	St Peters	61	295 160 677	info@wichard.com.au
Azores	Boat & Sailservice	9500-771	Sao Miguel	351	963925707	boatsailservice@gmx.net
Azores	Mid Atlantic Yacht Services	9900-114	Horta	351	292 391 616	mays@mail.telepac.pt
Belgium	Elvstrom Sails Benelux	2000	Antwerpen	32	0 495707870	info@elvstromsails.be
Belgium	Plaisance Diffusion	1030	Bruxelles	32	0 2 216 79 34	info@plaisance.be
Belgium	Technique Voile	4432	Alleur	32	0 42 63 4041	info@technique-voile.be
Belgium	West Diep Yachting Center	8620	Nieuwpoort	32	0 58 23 40 61	info@westdiep.com
Belgium	Wittevrongel Sails BV	8370	Blankenberge	32	04 96 28 45 75	ian@wittevrongel.be
Belgium	Wittevrongel Rigging	8370	Blankenberge	32	04 96 28 45 76	steve@wittevrongel.be
Brazil	Rio Sail Tech	22290-240	Rio de Janeiro	55	254 202 33	contato@riosailtech.com.br
Canada	WPG Canada	JOB 3G0	Stoke (Québec)	1	819 878 30 18	info@wichard.ca
Canary islands	Nordest	38370	La Matanza Tenerife	34	922 577 322	nordest@nordest-canarias.com
Chile	Oceanic Chile		Santiago	562	244 20 20	contacto@oceanic.cl
China	Sunrise Marineware Ltd		Shenzhen	86	755 866 50 101	sales@sunrisew.com
Croatia	Aspar Rigging	51211	Matulji	385	51 343 230	aspar-rigging@ri.t-com.hr
Croatia	Ramina Pomorstvo	21000	Split	385	2139 82 33	office@raminapomorstvo.hr
Denmark	PS Rigging	6200	Aabenraa	45	31 69 31 39	info@ps-rigging.com
Dutch Caribbean	Budget Marine St Martin		Philipsburg	1	5 995 443 134	stmaarten@budgetmarine.com
Dutch Caribbean	FKG Marine St Martin		Philipsburg	599	544 47 33	info@fgkmarine.com
Finland	Oy Maritim AB	210	Helsinki	358	10 27 40 320	maritim@maritim.fi
France	Wichard S.A.S	63300	Thiers	33	(0)4 73 51 65 00	marine@wichard.com
French Polynesia	Tahiti Sport / Nauti Sport	98713	Papeete	689	50 59 59	tahiti.sport@tahiti-sport.pf
Germany	Pfeiffer Marine Gmbh	78345	Moss am Bondesee	49	07732 9950 32	info@pfeiffer-marine.de
Greece	Nautilus	17455	Alimos / Athens	30	210 98 54 238	info@nautilus.gr
Greece	A.Andreou & Co	Tk 18346	Athens	30	210 48 28 452	info@aandreou.gr
Greece	Waypoint	31100	Lefkas	30	26450 21461	info@waypointsails.com
Grenada	Turbulence Ltd Grenada		Prickly bay	473	439 44 95	info@turbulenceldt.com
Guadeloupe	Carabe Greement Guadeloupe	97110	Pointe À Pitre	590	90 82 01	carabegreement@hotmail.com
Hong Kong	Storm Force Marine Ltd		Wanchai	852	28 660 114	sales@stormforcemarine.com
Hungaria	Fuke Yachts (Hullam 04)	8220	Balatonalmadi	36	884 328 97	info@fukeyacht.hu
Ireland	Masts & Rigging Ireland Ltd	A92 TP49	Duleek	353	41 988 0389	info@riggers.ie
Israel	Atlantis Marine	63453 25	Tel Aviv	972	(03) 522 7978	atlantis@inter.net.il
Italy	C-Marine S.r.l	19030	Bocca Di Magra - Sp	39	0187 67 08 28	info@cmarine.it
Japan	Cosmos Marine Ltd	556-0023	Osaka	81	665 672 397	cosmarin@pure.ne.jp
Japan	Marine Services Kojima	236-0003	Kanagawa	81	457 903 581	toiawase@mskojima.co.jp
Malta	Gauci Borda	GZR03	Gzira	356	2131 3758/3748	info@gauciborda.com
Martinique	Carabe Marine	97290	Le Marin	596	74 80 33	cgmar@wanadoo.fr
Netherlands	Masterspars	1693 BN	Wervershoof	31	(0)610627948	sales@masterspars.com
New Caledonia	Marine Corail	98800	Nouméa	687	27 58 48	info@marine-corail.nc
New Caledonia	Pacific Accastillage	98845	Nouméa	687	78 78 46	pacificaccastillage@gmail.com
New Zealand	Kiwi Yachting	90114	Auckland	64	9 36 00 30 0	sales@kiwiyachting.co.nz
Norway	Southern Cross Spars AS	1363	Høvik	47	(0)95977482	info@southerncross.no
Poland	Majer Na Fali	01-971	Varsovie	48	533 655 095	office@majernafali.pl
Portugal	Lisnautica Lda	1300-340	Lisbon	351	21 36 39 084	lisnautica@gmail.com
Portugal	Just Boats Lda	8100-263	Loule	351	281 971 179	info@just-boats.net
Portugal	Blaus 3 Sailing Services	8100-068	Boliquime	351	916 267 103	info@blaus.pt
Réunion Island	La voilerie du port	97420	Le Port	33	(0)6 92 21 76 69	voilerieduport@hotmail.com
Russia	Fordewind-Regatta	197110	Saint Petersburg	7	8 123 201 853	info@fordewind.spb.ru
Saint Martin	Yacht Rigging St Martin	97150	Saint Martin	590	29 52 52	mustyachtrigging@domaccess.com
Singapore	Intermarine Supply	639078	Jurong	65	686 33 966	ropes@intermarine.com.sg
Slovenia	Skipper Portoroz	6320	Portoroz	386	5 67 770 11	skipper@siol.net
South Africa	Sparcraft Masts	7435	Cape Town	27	(0)21 555 3340	info@sparcraftmasts.co.za
Spain	YangBela Technic Sail S.L.	20280	Hondarribia	34	9 436 44 459	edouardo@yangbela.com
Sweden	Liros Skandinavia AB	42750	Billdal	46	3191 52 00	info@lirosropes.se
Switzerland	Megroz Voiles	1070	Puidoux	41	21 946 49 49	pm@fragniere-megroz.ch
Switzerland	MW Matelotage	1252	Meinier	41	79 203 41 11	denis.menetrey@mwmatelotage.ch
Taiwan	Storm Force Marine Ltd		Wanchai	852	28 660 114	sales@stormforcemarine.com
Thailand	Storm Force Marine Ltd		Wanchai	852	28 660 114	sales@stormforcemarine.com
Trinidad and Tobago	Budget Marine Trinidad Ltd		Chaguanas	1	868-634-2006	trinidad@budgetmarine.com
Turkey	Prima Deniz	34728	Istanbul	90	216352240	kayayelken@superonline.com
United Kingdom	Proboat Ltd	CMO 8TE	Burnham-On-Crouch	44	1 621 78 54 55	sales@proboat.co.uk
Uruguay	Kraen Sa	70.000	Colonia	598	52-23814	kraen@adinet.com.uy
USA	Wichard, Inc.	NC 28206	Charlotte	1	4 016 835 055	usasales@wichard.com

They sail with Profurl !



Pogo 44



Outremer 5.X
We Explore - Roland Jourdain



Victoire Martinet
Mini 6.50



Bureau Vallée 3 - L Burton
Imoca 60

WICHARD S.A.S
1, ZI de Felet - CS 50085
63307 Thiers Cedex
France
Tel +33 (0)4 73 51 65 00
E-mail : marine@wichard.com

**Hotline / Technical Support /
After sales service**
Z.A Pornichet Atlantique
16 av du Gulf Stream
44380 Pornichet - France
Tel +33 (0)2 51 76 00 35
E-mail : hotline@wichard.com

**WICHARD, Inc.
North America**
3901 Pine Grove Circle
Charlotte, NC 28206
Tel: +1 (401) 683-5055
Fax: +1 (802) 655-4689
E-mail: usasales@wichard.com

WICHARD Pacific Pty Ltd
PO Box 104 St Peters
NSW 2044
Australia
Phone: +61 2 9516 0677
Fax: +61 2 9516 0688
E-mail: info@wichard.com.au